
## **Cloud Connection for RSC + App**



### **Setting up the B426-M IP Module**

In the panel settings, set Network Connect the B426-M IP In the panel settings, set Cloud Connect Module 1 (or 2) to "Used - B4xx-M": Module to the panel and for the relevant module to "Yes' to the local area network On the Icon keypad, this is On the Icon keypad, this is location location 0081 (or 0082), value "3" 4456 (or 7456), value "4" On the Text keypad or On the Text keypad or touchscreen, touchscreen, this is in menu 7-2-1 this is in menu 7-2-1 (second Set the address of the module to 1 (or 2 if you In A-Link Plus, this is under Comm are using a 2<sup>nd</sup> module) > Network Config In A-Link Plus, this is under Network Module Programming > Module x# > Advanced Network Settings Optional: If you want to use a specific local IP address, you will need to use A-Link Plus to set the IP Address, Subnet, Gateway, and DNS Servers under Network Module Programming > Module x#. Don't forget to disable DHCP.

#### **Setting up the B450-M Plug-in Communicator Module**

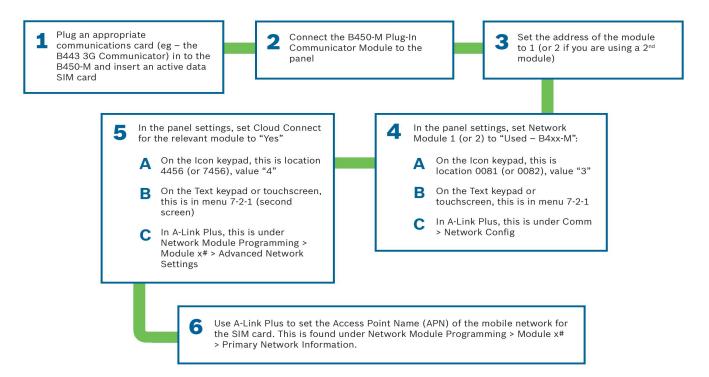

# **Cloud Connection for RSC + App**



#### **Common Access Point Names (APNs)**

#### Australia

- Telstra telstra.wap
- Optus internet
- Vodafone live.Vodafone.com
- Virgin yesinternet
- ALDI / Telechoice / Woolworth's Connect / CMobile Blue – mdata.com.au

#### **New Zealand**

- Telecom / Digital Island / Spark internet.telecom.co.nz
- Vodafone www.vodafone.co.nz
- 2Degrees internet
- Black+White www.m2.net.nz
- CallPlus www.callplus.net.nz
- Orcon www.orcon.net.nz

### **Setting up the RSC+ Mobile Phone App**

