



Solution 2000/3000 - Configuration Guide for Email Reporting

Modified on: Tue, 3 Sep, 2019 at 10:24 AM

Here is the setting up guide for Email Reporting with B426-M or B450-M+B443 for Solution 2000/3000 using A-Link Plus.

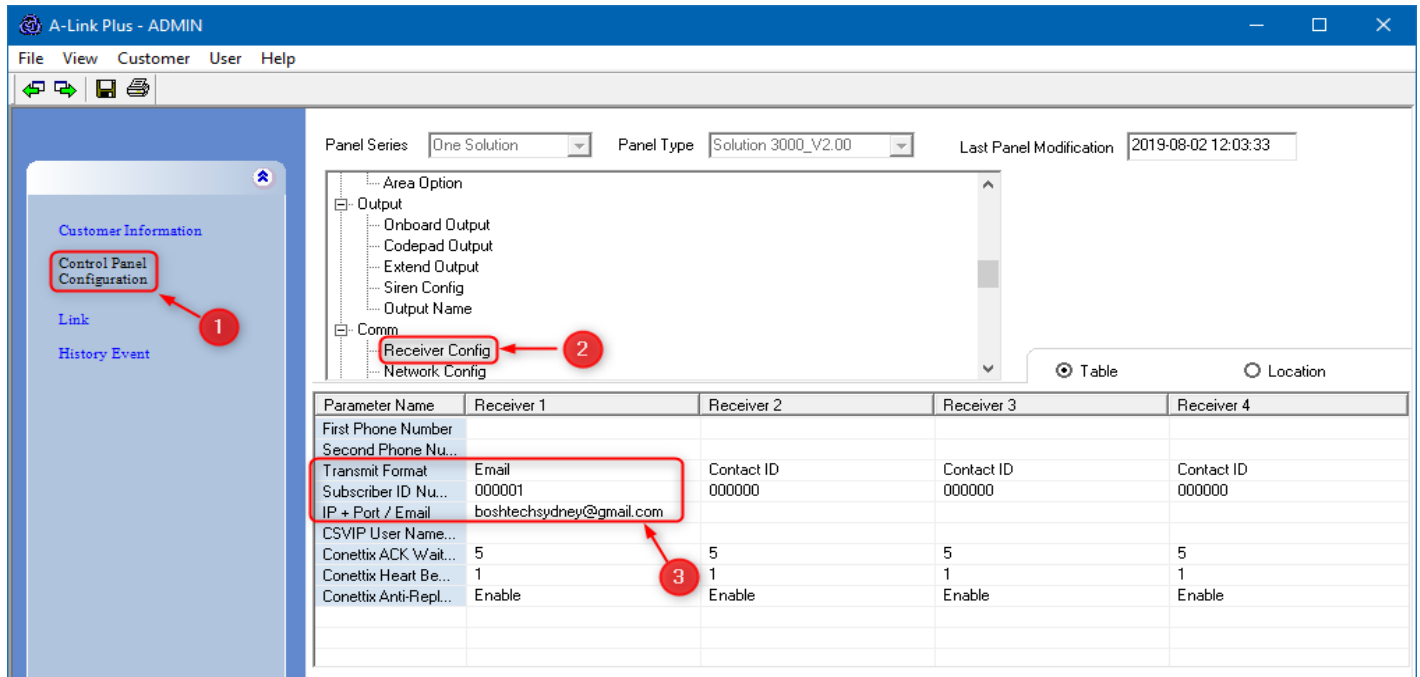


- (1) Click "Control Panel Configuration";
- (2) Click "Receiver Config" under "Comm";
- (3) Select Comm -> Receiver Config -> Transmit Format, select Email;
 Select Comm -> Receiver Config -> Subscriber ID Number, enter Email title with consist of 6 numbers;
 Select Comm -> Receiver Config -> IP + Port / Email, enter email address of the recipient.

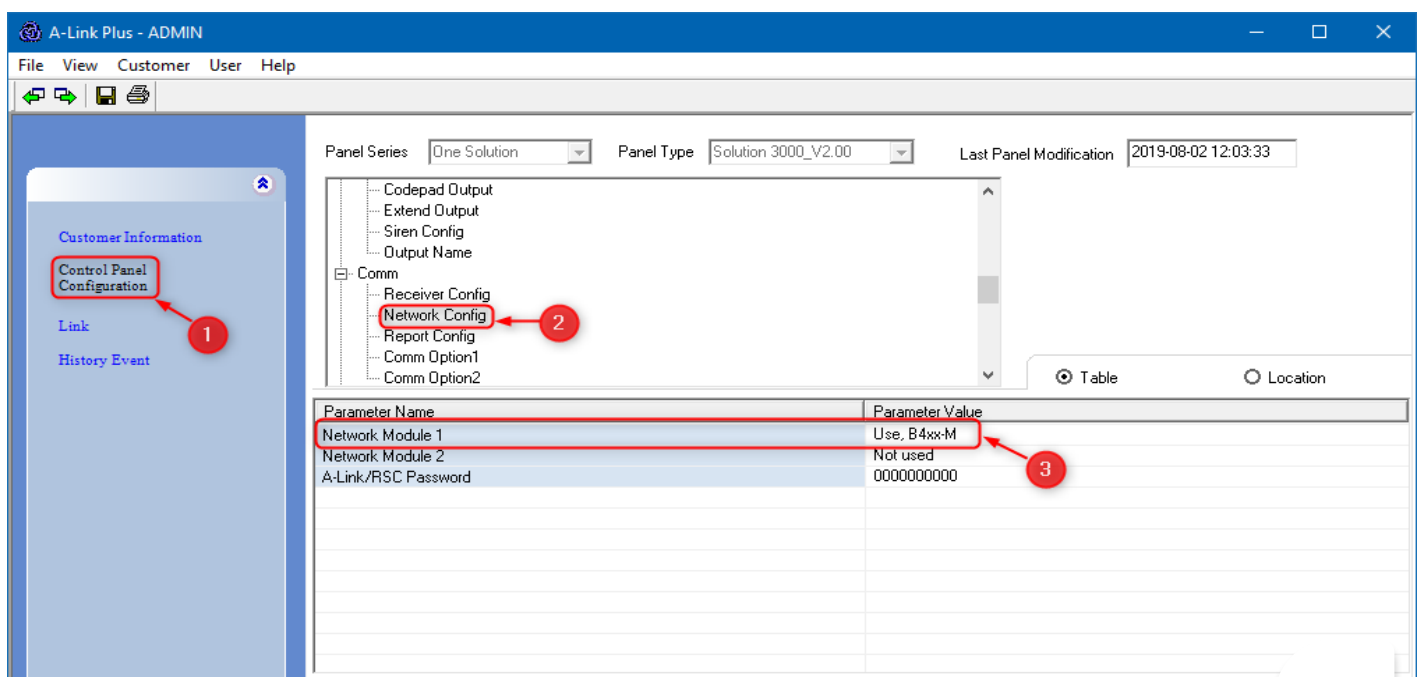

- (1) Click "Control Panel Configuration";
- (2) Click "Network Config" under "Comm";

(3) Select Module 1 or Module 2 as "Use and configure" or "Use, B4xx-M".

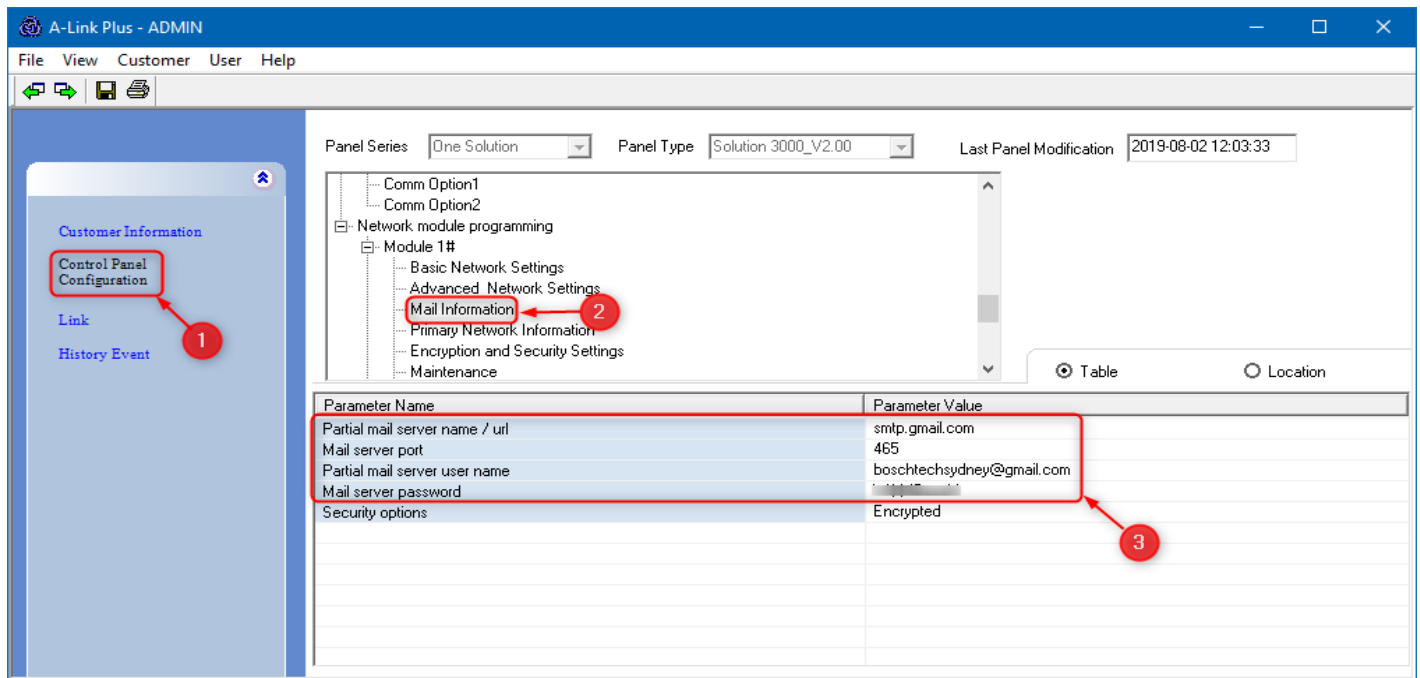

(1) Click "Control Panel Configuration";

(2) Select Network module programming -> Module 1 (or 2) -> Mail Information;

(3) Enter email information. Take the sender as boschtechsydney@gmail.com for example, :

- Partial mail server name / url : smtp.gmail.com
- Mail server port: 465
- Partial mail server user name: boschtechsydney@gmail.com
- Mail server password: (enter current password)
- Security options: Encrypted