

# TDL-8FB

**TROJAN**  
DEVELOPMENTS


## Eight Way Fuse Board

The TDL-8FB is an 8 Way Fuse Board. It has 8 individual fused outputs. Each fuse has an associated LED to indicate that the fuse is operative. The LED illuminates green for normal positive 12Vdc operation and amber for AC voltages up to 24Vac.

## Installation Wiring Diagram

Fused out puts to the verious loads such as door locks or cameras

The board comes complete with 3 Amp fuses

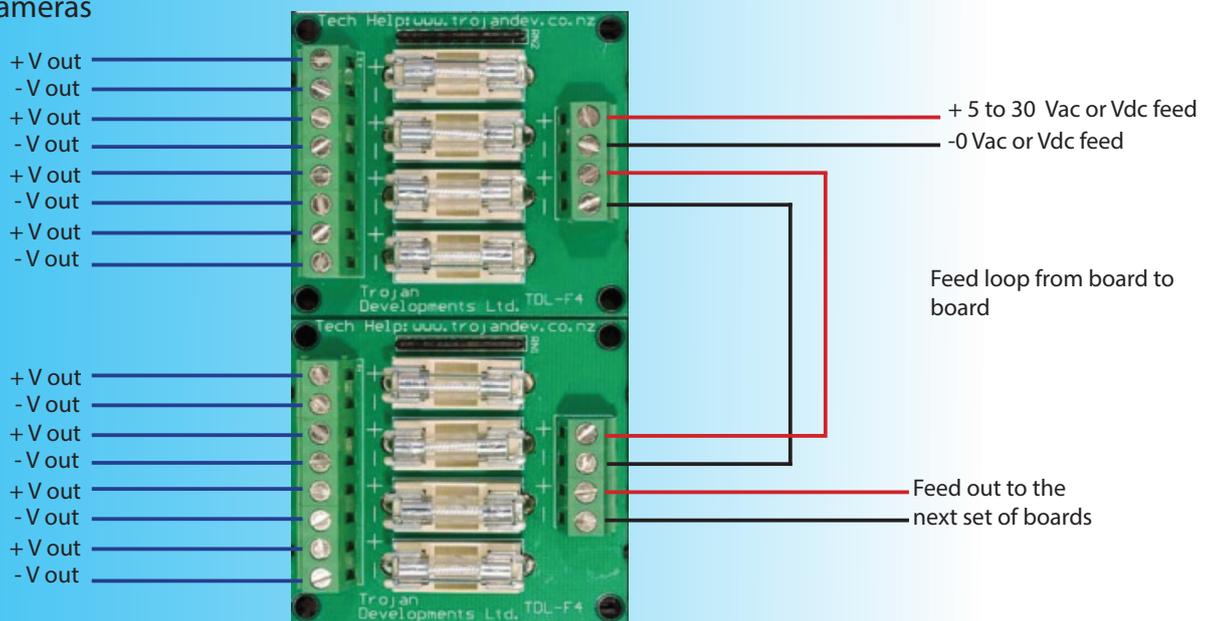

## Specifications:

- ▼ 8-Way Fuse Board
- ▼ Fuse size: 20mm x 5mm (included with the board)
- ▼ Terminals for positive and negative outputs - the positive outputs are fused
- ▼ Suitable for AC and DC power supplies
- ▼ Maximum supply current per 4-way fuse board is 20 Amps
- ▼ Maximum output current is 5 Amps with the upgrade of the Fuse rating
- ▼ Dimensions: 110mm (w) x 60mm (h) x 23mm (d)

## Product code:

- ▼ TDL-8FB

▼ [www.trojandev.co.nz](http://www.trojandev.co.nz)

▼ [sales@trojandev.co.nz](mailto:sales@trojandev.co.nz)



developing innovative egress solutions since 1987